



LED

CANADIAN LIGHTING MANUFACTURER
COMMERCIAL · AGRICULTURAL · INDUSTRIAL

Service, Quality and Innovation

GET MORE LIGHT.

Since 2014 JW LED Inc. is a local manufacturer providing the industry with high quality LED light fixtures for all applications.

The journey began when in our fabrication shop the trusty old fluorescent lights were burning out. There was talk of LED lights, the latest and greatest in the history of all lighting. From all that was available we only found the LED tubes but not the metal fixtures. Motivated by that fact, an urge to create our own fixtures came to life. We had our own machines and with the paint shop not far away, drawings were made and some time was spent and before too long the first fixtures were cut and bent. We assembled these fixtures, put the LED tubes in and up they went. Little by little we got some requests for these fixtures from our neighbors and friends, so upgrades were made and so on it rolled.

JW LED Inc. offers fully certified lighting packages for **INDUSTRIAL, AGRICULTURAL** as well as **COMMERCIAL** applications. We manufacture our fixtures locally. Beginning with laser fabrication going over to powder painting then finishing with assembly and stocking.

Using high grade aluminum for our LED boards and only buying top end LED Chips gives our boards ratings to run for more than 50,000 hours. With our own SMT line we are capable of populating the LED boards with a variety of IN STOCK color options from Warm White to Cool White. The LED Driver is the ENGINE of a light fixture and the drivers we use are currently chosen because of PERFORMANCE and DURABILITY. We stock these parts for each fixture we make and they are covered by our 5 year standard warranty allowing us to provide AFTER SALES SERVICE.

Our main focus is to provide installers and home owners with competitive, always in stock unique light fixtures that are easy to install and suitable for the application while providing enough or more than enough light for the area.

Contact us today for more details.

JW LED Inc.

📍 346142 4th Concession B, Flesherton ON N0C 1E0

📞 226-916-1240 ✉ purchasing@jwled.ca 🖱️ jwled.ca

CONTENTS

INDOOR LIGHTING

| | |
|-------------------------------------|-------|
| BA-Series Linear High Bays..... | 2-7 |
| BA-Series Linear Low Bays..... | 8-11 |
| LZ-Series Vaportight Fixtures | 12-15 |
| UFO High Bays..... | 16-17 |
| Tube Lighting..... | 18-23 |
| Integrated Strips | 24-25 |
| Light Bulb's..... | 26-31 |

OUTDOOR LIGHTING

| | |
|--------------------|-------|
| Flood Lights | 32-33 |
| Solar Lights..... | 34-35 |
| Wall Packs..... | 36-37 |

GROW LIGHTING

| | |
|----------------------------------|-------|
| 4 Foot Linkable Grow Lights..... | 38-39 |
|----------------------------------|-------|

2'X2' LINEAR HIGH BAY

2X2 Fixture With No Lenses



2X2 Fixture With Lenses




- Canadian made square high bay! Hobby shop, truck shop, farm shop/ shed, industrial buildings and commercial buildings.
- 150 lumens per watt
- Simple removable front cover to fasten fixture directly to any ceiling
- Back access is simple when hanging fixture on a chain
- Low profile at only 1.75" thick!
- 5 year warranty



Handy Dimmer Kit
(Kit Sold Separately)



Hooks For Chain Hanging
(Hooks Sold Separately)

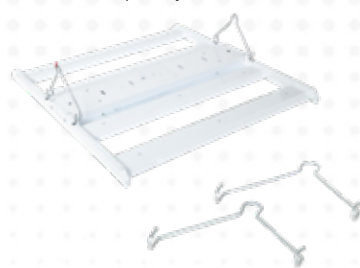

Frosted Lenses
(Sold Separately)



Plastic Extruding Shop
Ceiling Mounted (6500K - No Lenses)



Metal Fabrication Shop
Ceiling Mounted (6500K - No Lenses)

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|---------------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|---------------|----------------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| BA-J26 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 4000K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-J27 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 5000K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-J28 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 6500K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-M24 | 347VAC | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 4000K/5000K/6500K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |

OPTIONAL ACCESSORIES

| Model # | Description |
|---------|---|
| BA-A22 | 2 Piece Hook Set To Easily Mount fixture by Chain (Sold Separately) |
| BA-W24 | Frosted Lens Kit For 2X2 Fixture (Sold Separately) |
| BA-X24 | Handy Dimmer Kit For 2X2 Fixture (Sold Separately) |

1'X4' LINEAR HIGH BAY

1X4 Fixture With No Lenses



1X4 Fixture With Lenses




- Canadian made linear high bay! Work shops, farm shop, industrial buildings and commercial buildings.
- Easy to use flip lever common connectors for faster installation
- Simple removable front cover to fasten fixture directly to any ceiling
- Back access is simple when hanging fixture on a chain
- Chain mounting hooks available
- 5 year warranty




Handy Dimmer Kit (Kit Sold Separately)



Hooks For Chain Hanging (Hooks Sold Separately)

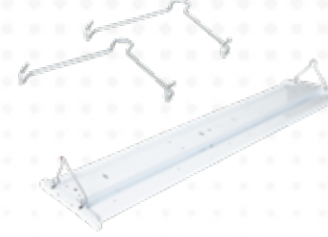

Frosted Lenses (Sold Separately)

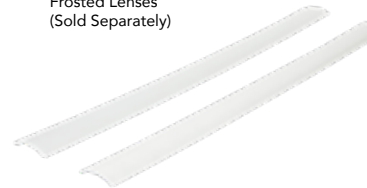

Assembly/Warehouse Ceiling Mounted (6500K - No lenses)



Fabrication Shop Ceiling Mounted (6500K - No Lenses)



Farm Shop Ceiling Mounted (5000K - Lenses Installed)

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|---------------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|---------------|----------------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| BA-I24 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 4000K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-I25 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 5000K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-I26 | 120-277 | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 6500K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-M23 | 347VAC | 130 | Dry Locations | 0-10Volt | cQPSus | 19500 | 4000K/5000K/6500K | 150 | 120° | Steel | White | 48"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |

| OPTIONAL ACCESSORIES | |
|----------------------|---|
| Model # | Description |
| BA-A22 | 2 Piece Hook Set To Easily Mount fixture by Chain (Sold Separately) |
| BA-W23 | Frosted Lens Kit For 1X4 Fixture (Sold Separately) |
| BA-X23 | Handy Dimmer Kit For 1X4 Fixture (Sold Separately) |

2'X4' LINEAR HIGH BAY

2X4 Fixture With No Lenses



2X4 Fixture With Lenses




- Canadian made high bay! Welding shops, fabrication shop, industrial buildings and commercial buildings.
- High lumen output 39,000 lumens for high ceiling
- Simple removable front cover to fasten fixture directly to any ceiling
- Back access is simple when hanging fixture on a chain
- Eliminate shadows with this 120 degree beam angle
- 5 year warranty




Handy Dimmer Kit
(Kit Sold Separately)



Hooks For Chain Hanging
(Hooks Sold Separately)

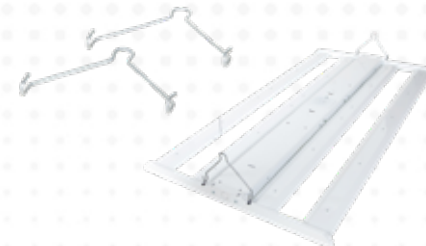

Frosted Lenses
(Sold Separately)

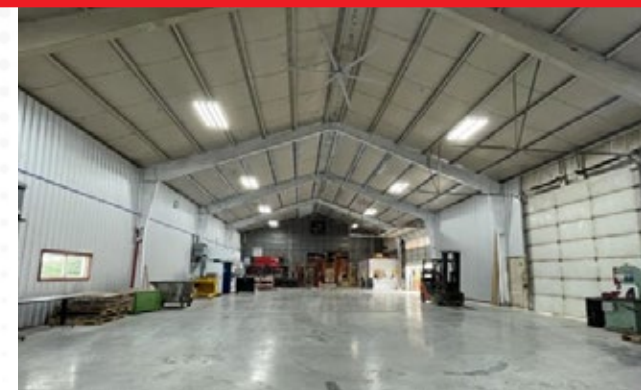

Metal Fabrication Shop
Chain Mounted (6500K - No Lenses)



Shipping/Receiving Warehouse
Ceiling Mounted (6500K - No Lenses)

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|---------------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|---------------|----------------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| BA-K28 | 120-277 | 260 | Dry Locations | 0-10Volt | cQPSus | 39000 | 4000K | 150 | 120° | Steel | White | 24"x48"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-K29 | 120-277 | 260 | Dry Locations | 0-10Volt | cQPSus | 39000 | 5000K | 150 | 120° | Steel | White | 24"x48"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-K30 | 120-277 | 260 | Dry Locations | 0-10Volt | cQPSus | 39000 | 6500K | 150 | 120° | Steel | White | 24"x48"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-M25 | 347VAC | 260 | Dry Locations | 0-10Volt | cQPSus | 39000 | 4000K/5000K/6500K | 150 | 120° | Steel | White | 24"x48"x1.75" | Flush Mount Or Chain Mount | 5 Year |


| OPTIONAL ACCESSORIES | |
|----------------------|---|
| Model # | Description |
| BA-A22 | 2 Piece Hook Set To Easily Mount fixture by Chain (Sold Separately) |
| BA-W25 | Frosted Lens Kit For 2X4 Fixture (Sold Separately) |
| BA-X22 | Handy Dimmer Kit For 2X42 Fixture (Sold Separately) |

4' LINEAR LOW BAY

Linear 4' Fixture With No Lens



Linear 4' Fixture With Lens

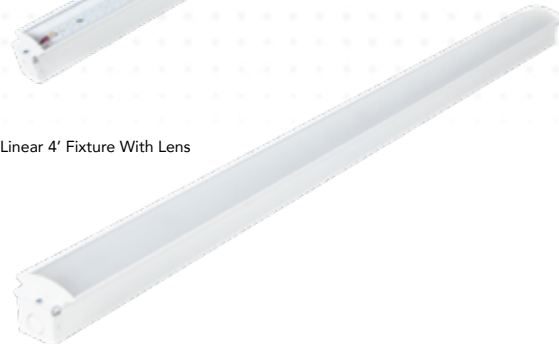

- Fast 8 foot fixture fix (connect 2 4 foot fixtures to create a linear 8')
- Canadian made linear low bay! overlays, shops garages, industrial buildings and commercial buildings.
- Easy to use flip lever common connectors for faster installation
- Flip open lid for installer friendly mounting
- Back access is simple when hanging fixture on a chain
- High efficacy at 150 lumens per watt
- 5 year warranty





Handy Dimmer Kit
(Kit Sold Separately)




Chain Hanging
(No Hooks Required)




Frosted Lens Kit
(Sold Separately)

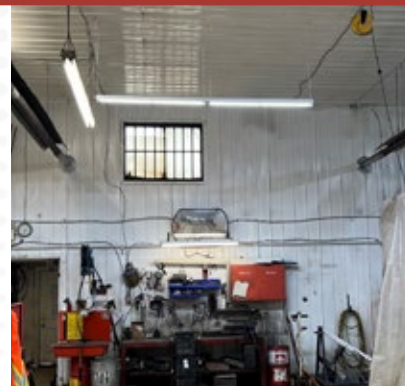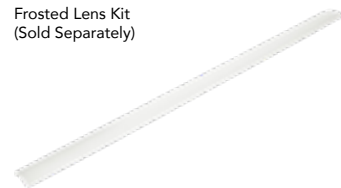

Bus Repair Shop
Chain Mounted (6500K - No Lenses)

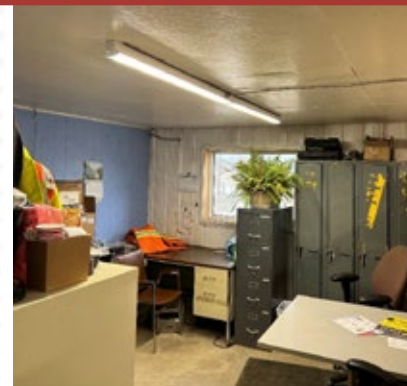

Office Retrofit
Ceiling Mounted (4000K - Lenses Included)

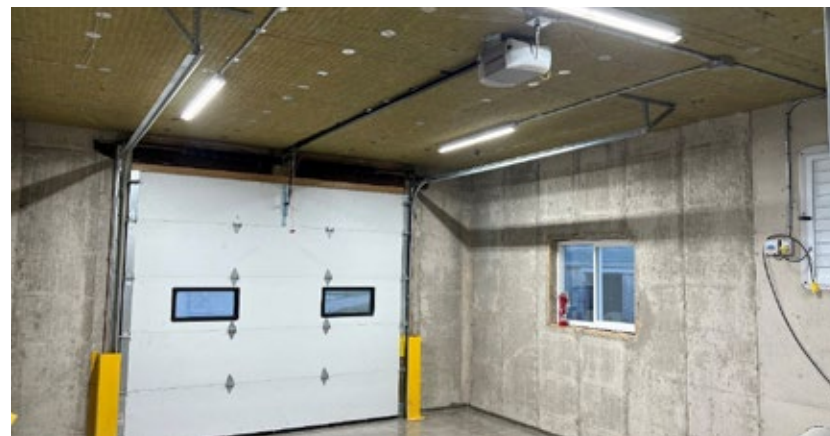

Generator Room
Ceiling Mounted (6500K - No Lenses)

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|---------------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|--------------|----------------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| BA-L31 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 4000K | 150 | 120° | Steel | White | 48"x3"x3.25" | Flush Mount Or Chain Mount | 5 Year |
| BA-L32 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 5000K | 150 | 120° | Steel | White | 48"x3"x3.25" | Flush Mount Or Chain Mount | 5 Year |
| BA-L33 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 6500K | 150 | 120° | Steel | White | 48"x3"x3.25" | Flush Mount Or Chain Mount | 5 Year |
| BA-M26 | 347VAC | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 4000K/5000K/6500K | 150 | 120° | Steel | White | 48"x3"x3.25" | Flush Mount Or Chain Mount | 5 Year |

OPTIONAL ACCESSORIES

| Model # | Description |
|---------|--|
| BA-W21 | Frosted Lens Kit For Linear 4' Fixture (Sold Separately) |
| BA-X26 | Handy Dimmer Kit For Linear 4' Fixture (Sold Separately) |

LINEAR 1'X2' LOW BAY



- Canadian made 1X2 low bay! Sheds, design rooms, mezzanines, work bench, commercial buildings and industrial buildings
- Easy to use flip lever common connectors for faster installation
- Simple removable front cover to fasten fixture directly to any ceiling
- Back access is simple when hanging fixture on a chain
- Low profile at only 1.75" thick, save ceiling space!
- Chain mounting hooks available
- 5 year warranty




Handy Dimmer Kit (Kit Sold Separately)



Hooks For Chain Hanging (Hooks Sold Separately)



Frosted Lens Kit (Sold Separately)

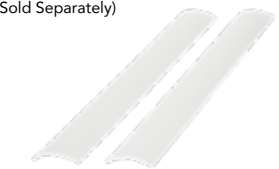

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|---------------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|---------------|----------------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| BA-H21 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 4000K | 150 | 120° | Steel | White | 24"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-H22 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 5000K | 150 | 120° | Steel | White | 24"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-H23 | 120-277 | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 6500K | 150 | 120° | Steel | White | 24"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |
| BA-M22 | 347VAC | 65 | Dry Locations | 0-10Volt | cQPSus | 9750 | 4000K/5000K/6500K | 150 | 120° | Steel | White | 24"x12"x1.75" | Flush Mount Or Chain Mount | 5 Year |

| OPTIONAL ACCESSORIES | |
|----------------------|---|
| Model # | Description |
| BA-A22 | 2 Piece Hook Set To Easily Mount fixture by Chain (Sold Separately) |
| BA-W22 | Frosted Lens Kit For 1X2 Fixture (Sold Separately) |
| BA-X25 | Handy Dimmer Kit For 1X2 Fixture (Sold Separately) |



Welding Shop Ceiling Mounted (6500K - No Lenses)

LZ-SERIES WIDE VAPORTIGHT

4 Foot (Wide Vaportight Fixture)



- Canadian made type 4x vaportight fixture with the body manufactured in U.S.A.
- Wide range of usage! Wash bays, dairy barns, chicken barns suitable for all moist or wet locations!
- Easy to use flip lever common connectors for faster installation
- Low to none ultra-violet radiation
- High wattage in a small package made possible by using aluminum LED boards for a good heat sink!
- Corrosion resistant great for barns!
- High Efficacy at 150 lumens per watt
- 5 year warranty



| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|-----------|----------|---------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|-----------------|---------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| LZ-A10 | 120-277 | 130 | Neema 4x | 0-10Volt | cQPSus | 19500 | 4000K/5000K/6500K | 150 | 120° | 5VA Fiberglass/Acrylic | White | 100"x6.4"x5.7" | Flush Ceiling Mount | 5 Year |
| LZ-A11 | 120-277 | 130 | Neema 4x | 0-10Volt | cQPSus | 19500 | 4000K/5000K/6500K | 150 | 120° | 5VA Fiberglass/Acrylic | White | 51.8"x6.4"x5.7" | Flush Ceiling Mount | 5 Year |
| LZ-A13 | 120-277 | 80 | Neema 4x | 0-10Volt | cQPSus | 12000 | 4000K/5000K/6500K | 150 | 120° | 5VA Fiberglass/Acrylic | White | 51.8"x6.4"x5.7" | Flush Ceiling Mount | 5 Year |


Handy Dimmer Kit (Kit Sold Separately)



Mounting Bracket Kit (Sold Separately)



| OPTIONAL ACCESSORIES | |
|----------------------|--|
| Model # | Description |
| LZ-G12 | Mounting bracket clip kit |
| LZ-S11 | Handy dimmer kit for LZ-Series vaportights |

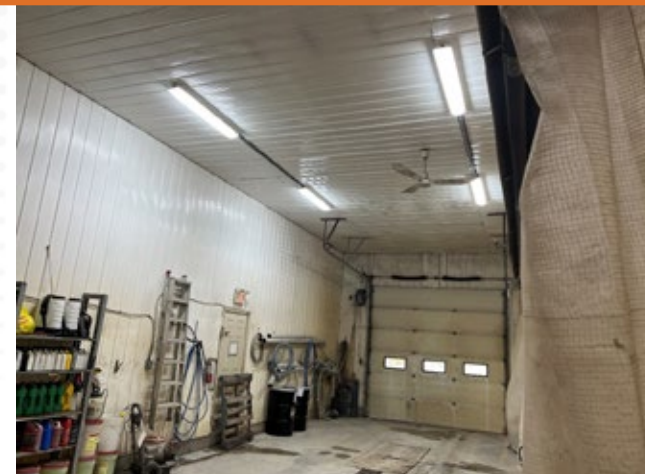

Bus Wash Bay Ceiling Mounted (130 Watt - 6500K)



Ceiling Mounted (60 Watt - 5000K)

LZ-SERIES NARROW VAPORTIGHT

LZ-Series Narrow Vaportight Fixtures



- Canadian made type 4x vaportight fixture with the body manufactured in U.S.A.
- Wide range of usage! Wash bays, dairy barns, chicken barns suitable for all moist or wet locations!
- Helps eliminate stray voltage
- Low to none ultra-violet radiation
- Reduces the chance to feed stray voltage back into the line
- Corrosion resistant great for barns!
- High efficacy at 150 lumens per watt
- 5 year warranty



| ELECTRICAL SPECIFICATIONS | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|-----------|----------|----------------------|--------|-------------------|---------------|------------|--------------------------|---------------|--------------|---------------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| LZ-A14 | 120-277 | 60 | Neema 4x | 0-10Volt | cQPSus | 9000 | 4000K/5000K/6500K | 150 | 120° | 5VA Fiberglass/Acrylic | White | 51.75"x4"x4" | Flush Ceiling Mount | 5 Year |
| LZ-A15 | 120-277 | 40 | Neema 4x | 0-10Volt | cQPSus | 6000 | 4000K/5000K/6500K | 150 | 120° | 5VA Fiberglass/Acrylic | White | 51.75"x4"x4" | Flush Ceiling Mount | 5 Year |

Handy Dimmer Kit (Kit Sold Separately)



Mounting Bracket Kit (Sold Separately)



Horse Barn Ceiling Mounted (60 Watt - 5000K)



Turkey Barn Ceiling Mounted (60Watt - 5000K)



Horse Barn Ceiling Mounted (60 Watt - 6500K)

| OPTIONAL ACCESSORIES | |
|----------------------|--|
| Model # | Description |
| LZ-G12 | Mounting bracket clip kit |
| LZ-S11 | Handy dimmer kit for LZ-Series vaportights |

HB SERIES UFO FIXTURES

4 Foot (Narrow Vaportight Fixture)



- Round high bays from local lighting companies CSC LED and EE Lighting
- Mostly recommended for warehouses or narrow aisle applications
- Easy hookup and labor friendly installations
- High efficacy at 140-150 lumens per watt
- 5 year warranty



| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|-----------|----------|-------------------|----------------------|-------------------|---------------|------------|--------------------------|---------------|--------------|-------------|----------|
| Model # | Voltage | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| HB-A22 | 120-277 | 100 | IP65 | 0-10Volt | cULus, DLC Listed | 14,486 | 4000K/5000K | 144 | 90° | Die-Cast Aluminum | Black | 12.20"x6.89" | Chain Mount | 5 Year |
| HB-A23 | 120-277 | 150 | IP65 | 0-10Volt | cULus, DLC Listed | 21,255 | 4000K/5000K | 142 | 90° | Die-Cast Aluminum | Black | 12.20"x6.89" | Chain Mount | 5 Year |
| HB-A24 | 120-277 | 240 | IP65 | 0-10Volt | cULus, DLC Listed | 35,519 | 4000K/5000K | 148 | 90° | Die-Cast Aluminum | Black | 14.56"x7.28" | Chain Mount | 5 Year |
| HB-B11 | 120-277 | 100 | Neema 4x | 0-10Volt | cULus, DLC Listed | 15,161 | 4000K/5000K | 150 | 110° | Die-Cast Aluminum | Black | 10.22"x7.3" | Chain Mount | 5 Year |
| HB-B12 | 120-277 | 150 | Neema 4x | 0-10Volt | cULus, DLC Listed | 22,723 | 4000K/5000K | 150 | 110° | Die-Cast Aluminum | Black | 11.37"x7.76" | Chain Mount | 5 Year |
| HB-B13 | 120-277 | 200 | Neema 4x | 0-10Volt | cULus, DLC Listed | 30,261 | 4000K/5000K | 150 | 110° | Die-Cast Aluminum | Black | 13.1"x7.95" | Chain Mount | 5 Year |

Motion Sensor (Sold Separately)




Remote For UFO Motion Sensor (Sold Separately)



| OPTIONAL ACCESSORIES | |
|----------------------|---|
| Model # | Description |
| HB-C11 | Screw in motion sensor for UFO High Bay |
| HB-C12 | Remote for UFO Motion Sensor |



Warehouse
150 Watt UFO (5000K)

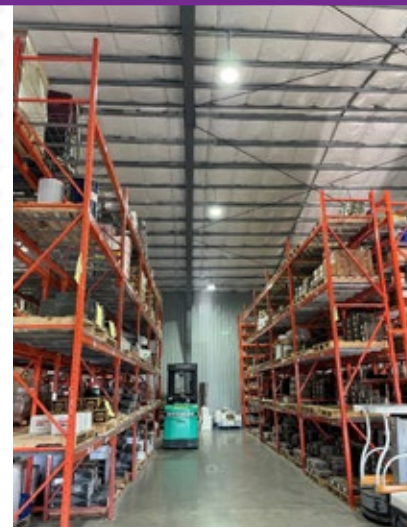

Warehouse
150 Watt UFO (5000K)

T8 TUBE

4 Foot T8 Tubes (Clear, Frosted Cover)



- Economical solution to upgrade your fluorescent tubes to LED!
- Variety of options from warm white to cool white
- Cut down your energy costs by 50-70%
- High efficacy tubes at 160 Lumens per watt
- Available in 2,3 and 4 foot lengths



3 and 2 Foot T8 Tubes (Frosted Cover)



Sewing Shop
4 Foot T8 Tubes (6500K-Clear Cover)

| Model # | Voltage | ELECTRICAL SPECIFICATIONS | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | |
|---------|---------|---------------------------|-------|---------------|---------|---------------|----------------------|-------------------|-----------|---------------|------------|--------------------------|---------------|------------|-----------------------------------|----------|
| | | Wiring Method | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| T8-B11 | 120-277 | Single End Power | 10 | Dry Locations | Non-Dim | cETLus | 1300 | 5000K | Frosted | 130 | 120° | Aluminum | Grey | 24"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-C11 | 120-277 | Single End Power | 15 | Dry Locations | Non-Dim | cETLus | 1950 | 6500K | Frosted | 130 | 120° | Aluminum | Grey | 36"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-D11 | 120-277 | Single End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 5000K | Clear | 160 | 120° | Aluminum | Grey | 48"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-D12 | 120-277 | Single End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 5000K | Frosted | 160 | 120° | Aluminum | Grey | 48"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-D13 | 120-277 | Single End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 6500K | Clear | 160 | 120° | Aluminum | Grey | 48"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-D14 | 120-277 | Single End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 6500K | Frosted | 160 | 120° | Aluminum | Grey | 48"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |
| T8-E11 | 120-277 | Double End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 6500K | Clear | 160 | 120° | Aluminum | Grey | 48"x1.1" | Retro Fit-Fluorescent Replacement | 3 Year |

| OPTIONAL ACCESSORIES | |
|----------------------|-------------------------|
| Model # | Description |
| T8-F11 | Slide in T8 tube holder |
| T8-F12 | Snap in T8 tube holder |

T8 Slide in lamp holder



T8 Snap in lamp holder



T5 TUBE


4 Foot Single End Power T5 (Frosted Lens)




4 Foot Single End Power T5 (Clear Lens)



- Economical solution to upgrade your fluorescent tubes to LED!
- Frosted or clear lens for your preference
- Cut down your energy costs by 50-70%
- High efficacy tubes at 160 Lumens per watt
- Instant start and flicker free

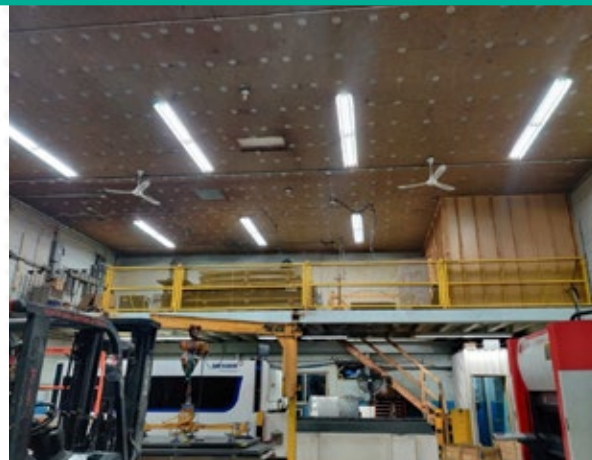

Metal Fab Shop
T5 Retro-Fit

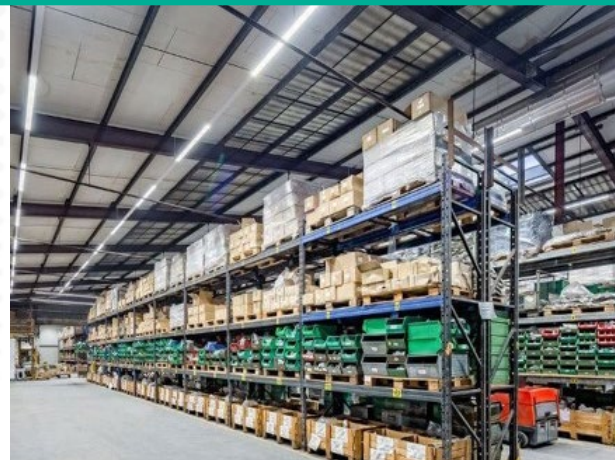

Warehouse - Tube Lighting 6500K

| ELECTRICAL SPECIFICATIONS | | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | | |
|---------------------------|---------|------------------|-------|---------------|---------|----------------------|--------|-------------------|---------------|---------------|--------------------------|------------------|---------------|--------------|-----------------------------------|----------|
| Model # | Voltage | Wiring Method | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| T5-A11 | 120-277 | Double End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 5000K | Clear Cover | 160 | 120° | Aluminum | Grey | 45.19"x0.86" | Retro Fit-Fluorescent Replacement | 3 Year |
| T5-A12 | 120-277 | Single End Power | 18 | Dry Locations | Non-Dim | cULus | 2880 | 5000K | Frosted Cover | 160 | 120° | Aluminum | Grey | 45.19"x0.86" | Retro Fit-Fluorescent Replacement | 3 Year |



View our products online at WWW.JWLED.CA

T12 8 FOOT TUBE

4 Foot Single End Power T5 (Frosted Lens)



- Economical solution to upgrade your fluorescent tubes to LED!
- Single or double pin available
- 8 foot fluorescent replacement
- Cut down your energy costs by 50-70%
- Instant start - no flicker




T12 Screw on clip to fasten 8 foot to fixture (Ordered Separately)



T12 Plastic End (comes with R17D base tube) Also available to order separately



T12 8 Foot LED Tubes - 6500K

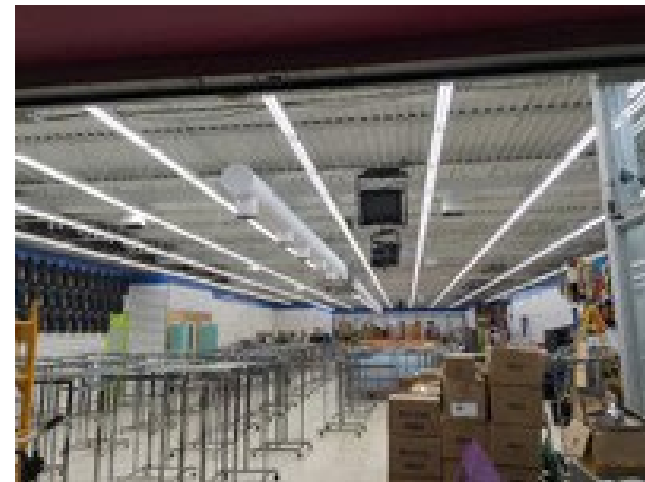

T12 8 Foot LED Tubes- 6500K

| ELECTRICAL SPECIFICATIONS | | | | | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | | |
|---------------------------|---------|-----------|------------------|-------|---------------|---------|---------------|----------------------|-------------------|-----------|---------------|--------------------------|------------------|---------------|--------------|-----------------------|----------|
| Model # | Voltage | T12-C12 | Wiring Method | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| T12-A11 | 120-277 | FA8 Type | Double End Power | 36 | Dry Locations | Non-Dim | cETLus | 4320 | 5000K | Clear | 120-130 | 120° | Aluminum | Grey | 93.187"x1.1" | Retro Fit-Fluorescent | 3 Year |
| T12-A12\ | 120-277 | FA8 Type | Double End Power | 36 | Dry Locations | Non-Dim | cETLus | 4320 | 5000K | Frosted | 120-130 | 120° | Aluminum | Grey | 93.187"x1.1" | Retro Fit-Fluorescent | 3 Year |
| T12-C11 | 120-277 | R17D Type | Double End Power | 36 | Dry Locations | Non-Dim | cETLus | 4320 | 5000K | Clear | 120-130 | 120° | Aluminum | Grey | 93.187"x1.1" | Retro Fit-Fluorescent | 3 Year |
| T12-C12 | 120-277 | R17D Type | Double End Power | 36 | Dry Locations | Non-Dim | cETLus | 4320 | 5000K | Frosted | 120-130 | 120° | Aluminum | Grey | 93.187"x1.1" | Retro Fit-Fluorescent | 3 Year |

| OPTIONAL ACCESSORIES | |
|----------------------|--|
| Model # | Description |
| T12-B11 | Plastic ends for T12 R17D |
| T12-B12 | Screw on clip to fasten 8 foot tube to a fixture |

INTEGRATED STYLE FIXTURES

4 Foot Single End Power T5 (Frosted Lens)



Mounting Clips and Connectors (Comes with each tube)



- Quick and easy setup with the plug and play style connections
- 180 degree beam eliminates shadows on a low ceiling
- Great for narrow aisles in a warehouse, workbenches, offices, lunchroom's and more!
- Cut down your energy costs by 50-70%
- Instant start - no flicker



Cable with Switch (Ordered Separately)



1.0m Cable (Ordered Separately)



Warehouse Shelving 4 Foot (5000K)



Workbench 4 Foot (6500K Frosted)

| ELECTRICAL SPECIFICATIONS | | | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|---------------|-------|---------------|---------|---------------|----------------------|-------------------|-----------|---------------|------------|--------------------------|---------------|---------------|--------------------------------|----------|
| Model # | Voltage | Wiring Method | Watts | IP Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| IN-A12 | 120-277 | Plug And Play | 15 | Dry Locations | Non-Dim | cETLus | 1950 | 5000K | Frosted | 130 | 180° | Aluminum | Grey | 24"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |
| IN-A13 | 120-277 | Plug And Play | 15 | Dry Locations | Non-Dim | cETLus | 1950 | 5000K | Frosted | 130 | 180° | Aluminum | Grey | 24"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |
| IN-B12 | 120-277 | Plug And Play | 20 | Dry Locations | Non-Dim | cETLus | 2600 | 5000K | Clear | 130 | 180° | Aluminum | Grey | 48"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |
| IN-B13 | 120-277 | Plug And Play | 20 | Dry Locations | Non-Dim | cETLus | 2600 | 5000K | Frosted | 130 | 180° | Aluminum | Grey | 48"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |
| IN-B14 | 120-277 | Plug And Play | 20 | Dry Locations | Non-Dim | cETLus | 2600 | 6500K | Clear | 130 | 180° | Aluminum | Grey | 48"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |
| IN-B15 | 120-277 | Plug And Play | 20 | Dry Locations | Non-Dim | cETLus | 2600 | 6500K | Frosted | 130 | 180° | Aluminum | Grey | 48"x1.3"x1.3" | Ceiling Mount (Clips Included) | 3 Year |

OPTIONAL ACCESSORIES

| Model # | Description |
|---------|----------------------------------|
| IN-C22 | Cable 1.0m Male and Female Ends |
| IN-C23 | Cable 1.5m Male and Female Ends |
| IN-C24 | Cable 200mm Male and Female Ends |
| IN-C25 | Cable with 110v Plug and Switch |

200mm Cable (Ordered Separately)



1.5m Cable (Ordered Separately)



GREENLITE NON-DIMMABLE LIGHT BULBS

9 Watt Bulb (Daylight) Order # GL-A10 12 Watt Bulb (Daylight) Order # GL-A11 14 Watt Bulb (Daylight) Order # GL-A12 19 Watt Bulb (Daylight) Order # GL-A13 29 Watt Bulb (Daylight) Order # GL-A14 36 Watt Bulb (Daylight) Order # GL-A15




| ELECTRICAL SPECIFICATIONS | | | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | |
|---------------------------|---------|-------|----------------|--------------------------------|---------|---------------|----------------------|-------------------|-----------|---------------|-------------|--------------------------|---------------|----------|----------|
| Model # | Voltage | Watts | IP Rating | Enclosure Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Mounting | Warranty |
| GL-A10 | 120VAC | 9 | Damp Locations | Not for enclosures | Non-Dim | cULus | 800 | 5000K | Frosted | 89 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-A11 | 120VAC | 12 | Damp Locations | Suitable for enclosed fixtures | Non-Dim | cULus | 1200 | 5000K | Frosted | 100 | Directional | Aluminum/Poly | White | Screw In | 3 Year |
| GL-A12 | 120VAC | 14 | Damp Locations | Suitable for enclosed fixtures | Non-Dim | cULus | 1600 | 5000K | Frosted | 114 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-A13 | 120VAC | 19 | Damp Locations | Suitable for enclosed fixtures | Non-Dim | cULus | 2000 | 5000K | Frosted | 105 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-A14 | 120VAC | 29 | Damp Locations | Suitable for enclosed fixtures | Non-Dim | cULus | 3050 | 5000K | Frosted | 105 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-A15 | 120VAC | 36 | Damp Locations | Suitable for enclosed fixtures | Non-Dim | cULus | 4500 | 5000K | Frosted | 125 | 360° | Aluminum/Poly | White | Screw In | 3 Year |

- From low to high power LED screw in bulbs
- 360 degree beam eliminates shadows on a low ceiling
- Lots of variety from low to high power
- Great for houses, offices, small rooms, sheds and fits any standard size bulb socket
- Cut down your energy costs by 50-70%
- Instant start - no flicker



Outdoor Rink 14 Watt (5000K) Order # GL-A12

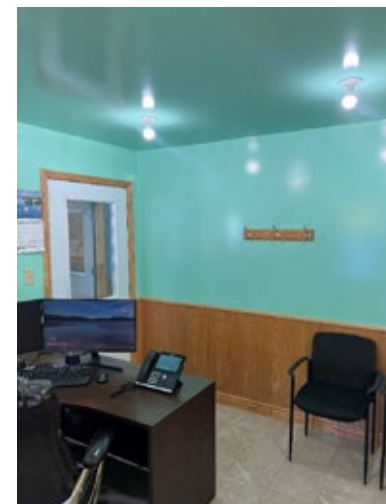

Office Area 14 Watt (5000K) Order # GL-A12

GREENLITE DIMMABLE LIGHT BULBS

6 Watt Bulb
(Daylight-Dimmable)
Order # GL-B09



6 Watt Bulb
(Warm White-Dimmable)
Order#GL-B10



9 Watt Bulb
(Daylight-Dimmable)
Order # GL-B11



15 Watt Bulb
(Daylight-Dimmable)
Order # GL-B13



22 Watt Bulb
(Daylight-Dimmable)
Order # GL-B14




| ELECTRICAL SPECIFICATIONS | | | | | | | LIGHT SPECIFICATIONS | | | | | | INSTALLER SPECIFICATIONS | | | |
|---------------------------|---------|-------|------------------|----------------|--------------------------------|----------|----------------------|--------|-------------------|-----------|---------------|------------|--------------------------|---------------|----------|----------|
| Model # | Voltage | Watts | Watt Equivalency | IP Rating | Enclosure Rating | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Mounting | Warranty |
| GL-B09 | 120VAC | 6 | 60 | Damp Locations | Not for enclosures | Dimmable | cULus | 480 | 5000K | Frosted | 89 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-B10 | 120VAC | 6 | 60 | Damp Locations | Not for enclosures | Dimmable | cULus | 480 | 3000K | Frosted | 100 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-B11 | 120VAC | 9 | 100 | Damp Locations | Suitable for enclosed fixtures | Dimmable | cULus | 800 | 5000K | Frosted | 114 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-B13 | 120VAC | 15 | 200 | Damp Locations | Suitable for enclosed fixtures | Dimmable | cULus | 1600 | 5000K | Frosted | 105 | 360° | Aluminum/Poly | White | Screw In | 3 Year |
| GL-B14 | 120VAC | 22 | 300 | Damp Locations | Not for enclosures | Dimmable | cULus | 2550 | 5000K | Frosted | 125 | 360° | Aluminum/Poly | White | Screw In | 3 Year |

- Greenlite dimmable LED bulbs
- 360 degree beam eliminates shadows on a low ceiling
- Great houses, offices, small rooms, sheds and fits any standard size bulb socket
- Cut down your energy costs by 50-70%
- Instant start - no flicker



Lunch Room 15 Watt (5000K) - Order #GL-B13

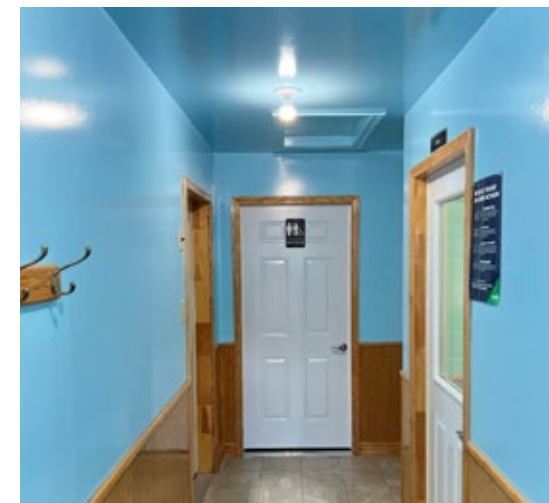

Hallway 15 Watt (5000K) - Order #GL-B13

CORN BULB LIGHT BULBS

15 Watt
5000K-Frosted Cover
Order # CB-A33



15 Watt
6500K-Frosted Cover
Order # CB-A34



60 Watt
5000K Clear Cover
Order #CB-A37



60 Watt
6500K Clear Cover
Order #CB-A37



30 Watt
12V DC 5000K-Clear Cover
Order # DC-A25



20 Watt 12V DC
5000K-Clear Cover
Order # DC-A24



100 Watt 120-277V
5000K-Clear Cover
Order #CB-D33




100 Watt 347V
5000K-Clear Cover
Order #CB-D34



Corn Bulbs - 6500K

| ELECTRICAL SPECIFICATIONS | | | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|----------------|-----------|--------------|---------------|----------------------|-------------------|-----------|---------------|------------|--------------------------|---------------|----------|----------|--|
| Model # | Voltage | Watts | IP Rating | Base Size | Dimming | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Mounting | Warranty | |
| CB-A33 | 120-277 | 15 | Damp Locations | E26 | Non-Dimmable | cULus | 1800 | 5000K | Frosted | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| CB-A34 | 120-277 | 15 | Damp Locations | E26 | Non-Dimmable | cULus | 1800 | 6500K | Frosted | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| CB-A37 | 120-277 | 60 | Damp Locations | E26 | Non-Dimmable | cULus | 7800 | 5000K | Clear | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| CB-A38 | 120-277 | 60 | Damp Locations | E26 | Non-Dimmable | cULus | 7800 | 6500K | Clear | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| CB-D33 | 120-277 | 100 | Damp Locations | E26 | Non-Dimmable | cULus | 12000 | 5000K | Clear | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| CB-D34 | 347 VAC | 100 | Damp Locations | E26 | Non-Dimmable | cULus | 12000 | 5000K | Clear | 120 | 360° | Aluminum/Poly | Grey | Screw In | 3 Year | |
| DC-A24 | 12V DC | 20 | Damp Locations | E26 | Non-Dimmable | N/A | 2400 | 5000K | Frosted | 120 | 360° | Aluminum/Poly | Grey | Screw In | 4 Year | |
| DC-A25 | 12V DC | 30 | Damp Locations | E26 | Non-Dimmable | N/A | 3600 | 5000K | Frosted | 120 | 360° | Aluminum/Poly | Grey | Screw In | 5 Year | |

- High powered corn bulb
- Replace regular light bulbs for a much brighter fixture
- 360 degree beam eliminates shadows on a low ceiling
- The most powerful screw-in light bulbs on the market!
- Cut down your energy costs by 50-70%
- Instant start - no flicker

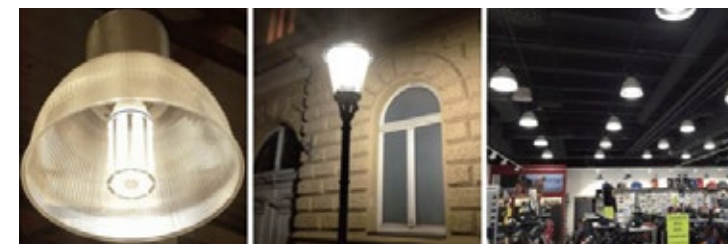

Corn Bulbs - 6500K

FLOOD LIGHTS WITH DAYLIGHT SENSORS

50 Watt floodlights, daylight sensor and 5 foot cord with male plug included

80 Watt and 100 Watt floodlights, daylight sensor and 5 foot cord with male plug included



150 Watt and 200 Watt floodlights, daylight sensor and 5 foot cord with male plug included



Turkey Barn 50 Watt Floodlights

| ELECTRICAL SPECIFICATIONS | | | | LIGHT SPECIFICATIONS | | | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|------------------|----------------------|--------|-------------------|-----------|---------------|------------|--------------------------|---------------|------------------|-----------------|----------|
| Model # | Voltage | Watts | IP Rating | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| FL-A15 | 100-277 | 50 | IP65 Wet/Outdoor | cETLus DLC | 6,500 | 5000K | Clear | 130 | 120° | Aluminum/Poly | Black/Brown | 7.3"x7.2"x2.4" | U-Bracket Mount | 5 Year |
| FL-A17 | 100-277 | 80 | IP65 Wet/Outdoor | cETLus DLC | 10,400 | 5000K | Clear | 130 | 120° | Aluminum/Poly | Black/Brown | 8.7"x8.3"x2.8" | U-Bracket Mount | 5 Year |
| FL-A19 | 100-277 | 100 | IP65 Wet/Outdoor | cETLus DLC | 13,000 | 5000K | Clear | 130 | 120° | Aluminum/Poly | Black/Brown | 8.7"x8.3"x2.8" | U-Bracket Mount | 5 Year |
| FL-A20 | 100-277 | 150 | IP65 Wet/Outdoor | cETLus DLC | 19,500 | 5000K | Clear | 120 | 120° | Aluminum/Poly | Black/Brown | 12.4"x10.4"x3.6" | U-Bracket Mount | 5 Year |
| FL-A21 | 100-277 | 200 | IP65 Wet/Outdoor | cETLus DLC | 26,000 | 5000K | Clear | 120 | 120° | Aluminum/Poly | Black/Brown | 12.4"x10.4"x3.6" | U-Bracket Mount | 5 Year |
| FL-A22 | 100-347 | 450 | IP65 Wet/Outdoor | cETLus DLC | 62,776 | 5000K | Clear | 139 | 120° | Aluminum/Poly | Black/Brown | 32"x13.03"x3.7" | Trunnion Mount | 5 Year |

- All in one floodlight with daylight sensor!
- Eliminate adding an extra daylight sensor
- Great for parking lots, yards, laneways and much more
- Rated for outdoors with 5 year warranty
- 5 foot cord included with a male plug for your convenience!
- Instant start - no flicker



Shop 150 Watt Floodlight

SOLAR FLOOD LIGHTS

3.5 Watt all in one solar man door light order #SF-A21



50 Watt solar light with panel order # SF-B11 (7.5 Foot Cord-Between Panel and Light)




| ELECTRICAL SPECIFICATIONS | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|-------|-----------|----------------------|-------------------|-----------|------------------|--------------------------|---------------|--|----------------------------------|----------|
| Model # | Watts | IP Rating | Lumens | Color Temperature | Lens Type | Sensor | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| SF-A21 | 3.5 | IP65 | 550 | 5000K | Clear | Occupancy Sensor | Die-Cast Aluminum | Black | 8.25"x5"x3" | Flush Wall Mount | 3 Year |
| SF-B11 | 50 | IP65 | 3,500 | 5000K | Clear | Occupancy Sensor | Die-Cast Aluminum | Black | Flood Light 8"x10"x2" Panel 14"x9"x0.5" | U Bracket (Flood Light an Panel) | 3 Year |

- Wireless flood/man door lights
- Dim until movement detected then full brightness
- Motion sensor included!
- Great for areas where no wiring is accessible
- Rated for outdoors!
- Li-Ion rechargeable battery included!



Solar Flood-Pole Mounted

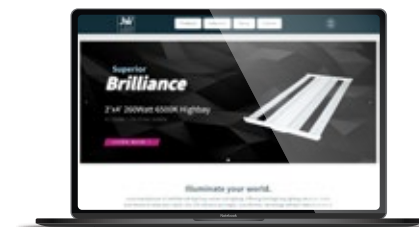View our products online at WWW.JWLED.CA

CSC WALL PACKS WITH DAYLIGHT SENSORS

Wall-Packs With Daylight Sensors 120-347V



- All in one wall pack with daylight sensor!
- Eliminate adding an extra daylight sensor
- Great for parking lots, yards, laneways and much more
- Rated for outdoors with 5 year warranty
- 120-347V universal voltage!




| ELECTRICAL SPECIFICATIONS | | | | | LIGHT SPECIFICATIONS | | | | | INSTALLER SPECIFICATIONS | | | | | |
|---------------------------|---------|-------|---------|-----------|----------------------|--------|-------------------|-----------|---------------|--------------------------|-------------------|---------------|--------------------|------------------|----------|
| Model # | Voltage | Watts | Dimming | IP Rating | Certification | Lumens | Color Temperature | Lens Type | Efficacy LM/W | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| WP-A11 | 120-347 | 40 | 0-10V | IP65 | cULus DLC | 5,623 | 30K/40K/50K | Clear | 140 | 120° | Die-Cast Aluminum | Bronze | 14.37"x9.33"x7.36" | Flush Wall Mount | 5 Year |
| WP-A12 | 120-347 | 60 | 0-10V | IP65 | cULus DLC | 8,208 | 30K/40K/50K | Clear | 140 | 120° | Die-Cast Aluminum | Bronze | 14.37"x9.33"x7.36" | Flush Wall Mount | 5 Year |
| WP-A13 | 120-347 | 80 | 0-10V | IP65 | cULus DLC | 11,071 | 30K/40K/50K | Clear | 137 | 120° | Die-Cast Aluminum | Bronze | 14.37"x9.33"x7.36" | Flush Wall Mount | 5 Year |
| WP-A14 | 120-347 | 120 | 0-10V | IP65 | cULus DLC | 16,942 | 30K/40K/50K | Clear | 137 | 120° | Die-Cast Aluminum | Bronze | 14.37"x9.33"x7.36" | Flush Wall Mount | 5 Year |

Motion Sensor
(Ordered Separately)



Remote required for motion sensor
(Ordered Separately)

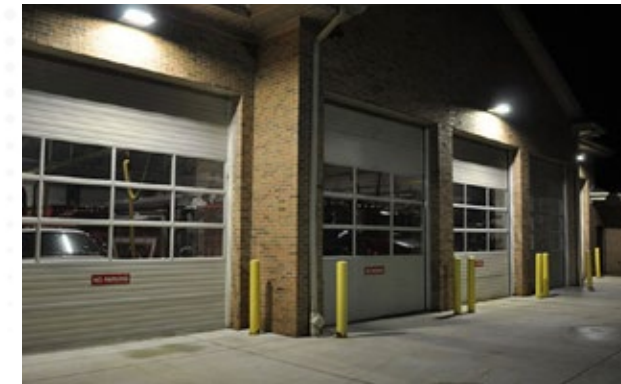

Samples - Wall Pack 5000K




5000K Wall Pack



5000K Wall Pack

LINKABLE GROW LIGHTS

4 Foot linkable growing lights order # GR-A11

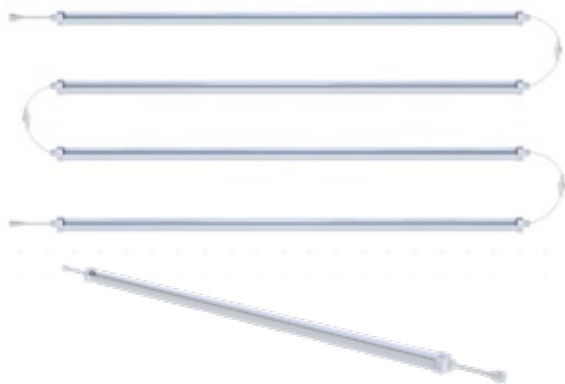

- Waterproof IP65
- Linkable growing lights
- Plug and play style for easy setup!
- Cord with plug and switch available
- 2 metre in between cord available
- Full spectrum to grow green products
- Daisy chain up to 25 bars on a single power cord!

2 foot in between cord Order #GR-A14



5 foot power cord Order # GR-A13



Full Spectrum Grow Lights (Cold Frame)

| ELECTRICAL SPECIFICATIONS | | | | LIGHT SPECIFICATIONS | | | | INSTALLER SPECIFICATIONS | | | | |
|---------------------------|---------|-------|-----------|----------------------|-------------------|-----------|------------|--------------------------|---------------|--------------------|---------------------------------------|----------|
| Model # | Voltage | Watts | IP Rating | PPF | Color Temperature | Lens Type | Beam Angle | Fixture Material | Fixture Color | Dimensions | Mounting | Warranty |
| GR-A11 | 120-277 | 18 | IP65 | 40 umol/S | Full Spectrum | Clear | 120° | Plastic/Poly | White | 47.04"x1.25"x1.25" | Flush Mount (Mounting Clips Included) | 3 Year |

| OPTIONAL ACCESSORIES | |
|----------------------|---|
| Model # | Description |
| GR-A13 | 5 foot cord with a male plug and switch for grow lights |
| GR-A14 | 2 foot in between extension cord for grow lights |



Shelf Grow Lighting - Full Spectrum

Illuminate your world.

WWW.JWLED.CA



📍 346142 4th Concession B, Flesherton ON N0C 1E0

☎ 226-916-1240 ✉ purchasing@jwled.ca