

Safety



Electric shock hazard.


Installation must be performed by a licensed electrician and conform to all national and local electrical codes.

Disconnect electrical power at the fuse or circuit breaker before installation.


Do not alter or modify the fixture.

Prepare Fixture

1. Disconnect electrical power at the fuse or circuit breaker for the circuit where fixture is installed.
2. Once electrical power has been shut off, identify the LED board that needs replacement and the 3 screws (A) securing it. Use a suitable screwdriver to carefully unscrew and remove the screws.

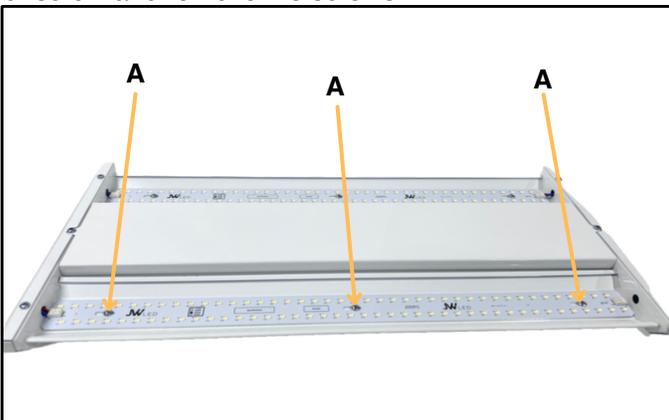


3. Next, locate and remove covers (B) and (C) using a suitable screwdriver to allow access to the wires connecting the LED board to the driver.

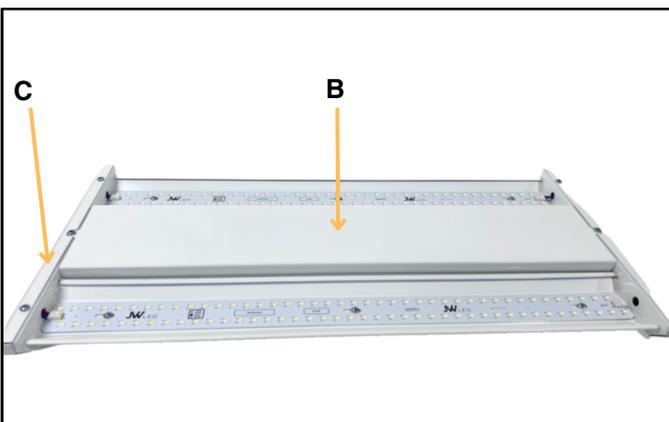

LED Board Removal Instructions

1. To disconnect the wires from the LED board, find the small release buttons located on the top of the connection points (F). Using a small tool, gently push the release buttons (F) while holding the wire. This will disengage the wire from the female connector, allowing removal.

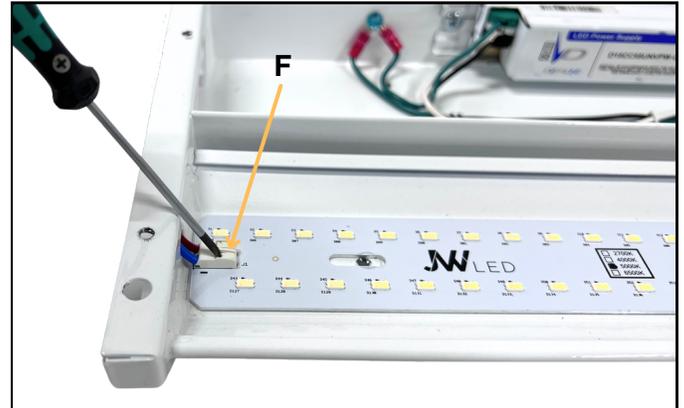

2. Once the buttons are pressed, gently pull all of the wires away from the driver to fully disconnect them. Take note of the wire locations for easier reinstallation later.



continued on next page..


LED Board Removal Instructions

3. Once you have verified that all wires are disconnected from the LED board, remove it. Now, you can proceed with the installation of the new LED board.




LED Board Installation Instructions

1. To start, re-attach the positive (A) and negative (B) wires to the female connector on the new LED board.

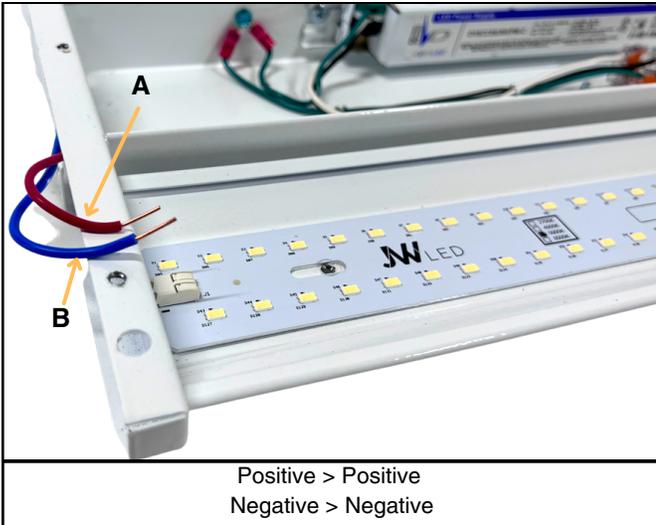

2. Secure the new LED board by screwing it in the same manner it was removed, maintaining the same board orientation as previous.

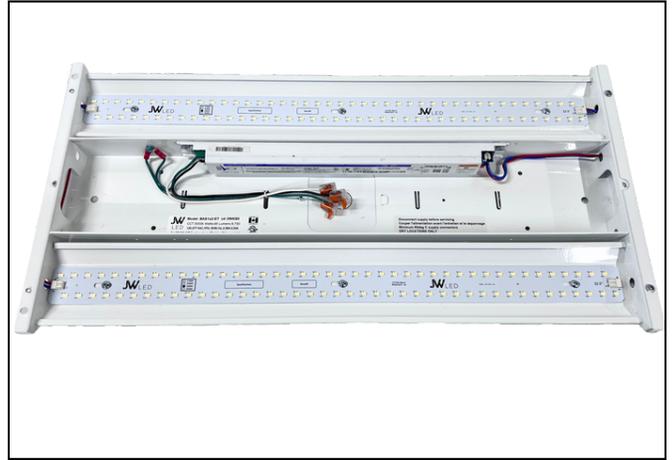

3. Confirm all wires are firmly connected to their respective spots. Test light to ensure functional operation.
4. Once you've confirmed the LEDs are working again, it's time to close the unit back up. Start by screwing down side panel (C) with the 4 screws (D) you initially removed. Finally, put the last cover on using the remaining 2 screws (E).

