



SP Series - SP4

4' Linear Commercial/Industrial Grade Low-Bay

2,000-12,000 Lumens

Project:

Location:

Cat.No:

Notes:

Product Description

The SP Series Linear 4' fixture delivers meticulously engineered illumination across expansive spaces with its wide distribution angle, making it the optimal choice for applications demanding broad coverage on medium to low ceilings. This versatile LED offers multiple lumen packages and mounting configurations to suit diverse project requirements. Its innovative design enables seamless row mounting, allowing two fixtures to create an 8-foot continuous unit, accommodating installation heights from 8 to 16 feet. Handcrafted with pride in Ontario, Canada, it's the reliable lighting solution for your most challenging projects.

Application

This unit is an excellent choice for industrial, commercial, and agricultural applications including metal fabricating shops, mezzanines, garages, offices, hallways, workbenches, grocery stores, tool stores, retail stores, aircraft hangars, repair rooms, hobby shops, and many other applications.

Features

- Configurations delivering over 160 lm/W for maximum efficiency.
- End-to-end mountable for seamless 8-foot fixture creation.
- Standard 0-10V dimming provides precise lighting control.
- High-performance LED boards manufactured in-house.


Options

- Wide range of lumen outputs to meet diverse requirements.
- Variety of motion sensors and control options available.
- Customizable color temperature and CRI values for optimal lighting.
- Pre-wired whips enable quick, efficient installation.

Mounting

- Surface - mounts directly to any ceiling or wall.
- Suspension - chain hangers available as additional option.

Approved for use in Canada and USA. QPS certified. Includes standard 5-year warranty—view our warranty policy for complete details.

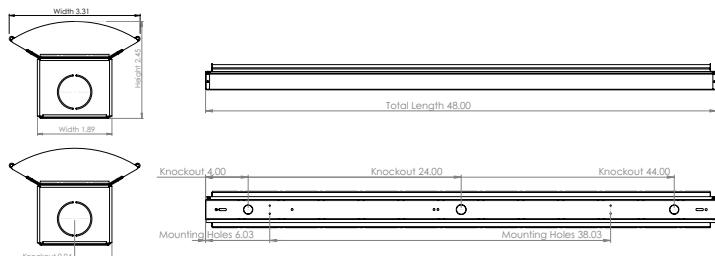

**5 YEAR
WARRANTY**



Ordering Guide Example: SP4-8C50K097L-UNVD1NW-NLSM

| CRI | CCT | Lumens | Voltage | Driver | 0-10V Wiring | Lens | Mounting | Options |
|-------|-----------|-------------|--------------|-------------|----------------------|-------------------|------------------------|------------|
| 8C 80 | 30K 3000K | 120L 12,000 | UNV 120-277V | D1 0-10V 1% | NW Not Wired for DIM | NL No Lens | SM Surface/Chain Mount | Blank None |
| 9C 90 | 40K 4000K | 097L 9,750 | 347 347V | | PW Pre-Wired for DIM | FS Frosted Smooth | TPP Retail Packaging | |

Accessories



Order Code: LNS0008

Frosted smooth acrylic lens diffuser



SCAN FOR TECHNICAL
AND IES FILES

Specification Chart

| Lumens | Watts | No Lens | Frosted Lens | Color | CRI |
|--------|-------|---------|--------------|-------|-----|
| 12,000 | 77 | 13,066 | 11,759 | 5000K | 80 |
| 9,750 | 57 | 9,750 | 8,775 | 5000K | 80 |
| 8,000 | 50 | 8,550 | 7,695 | 5000K | 80 |
| 6,000 | 40 | 6,840 | 6,156 | 5000K | 80 |
| 4,000 | 25 | 4,275 | 3,848 | 5000K | 80 |
| 2,000 | 15 | 2,565 | 2,309 | 5000K | 80 |

Testing based on 25°C ambient temperature. Nominal calculations—actual outputs may vary based on product configurations. We reserve the right to correct printing errors or mistakes in our specifications.